

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Description


AM3215 is a broadband eight-way bandpass filter bank offering low loss and high rejection from 2 GHz to 18 GHz. Each band delivers 2 GHz of bandwidth. With internal 50Ω matching and packaged in a 9mm QFN, the AM3215 represents a compact total PCB footprint, the AM3215 is suited for low SWaP applications.



Features

- Broadband, 2 to 18 GHz
- +3.3V to +5.0V Supply
- +3.3V to +5.0V Control
- 7.5 dB Insertion Loss
- 17 dB Return Loss
- +15 dBm P1dB
- 9mm QFN Package
- -40C to +85C Operation

Functional Diagram

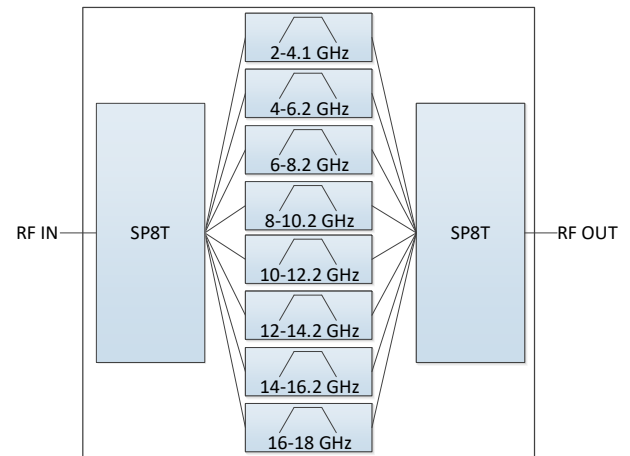

Characteristic Performance

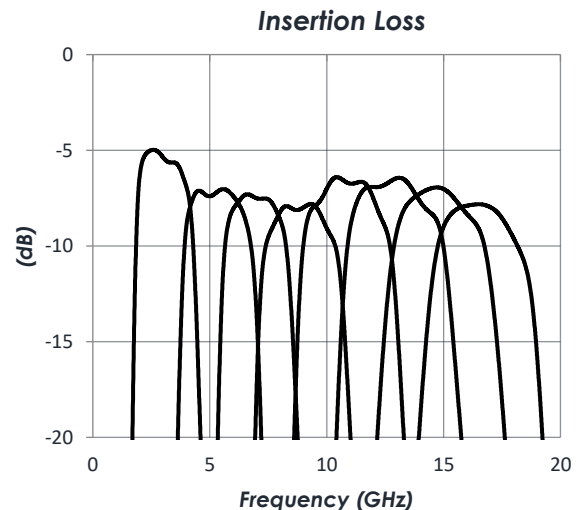
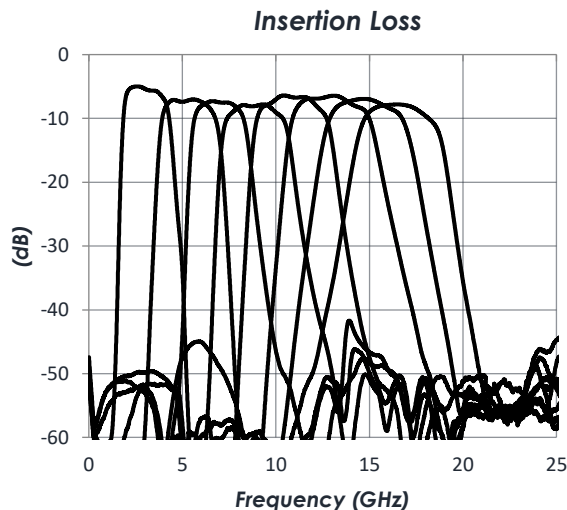


Table of Contents

Description	1	Recommended Operating Conditions ...	5
Features	1	DC Characteristics	6
Functional Diagram	1	RF Performance	6
Characteristic Performance	1	Timing Characteristics	6
Revision History	2	State Table	6
Pin Layout and Definitions	3	Typical Performance	7
Pin Layout and Definitions	4	Typical Application	11
Specifications	5	Evaluation PC Board	12
Absolute Maximum Ratings	5	Related Parts	12
Handling Information	5	Component Compliance Information	13


Revision History

Date	Revision Number	Notes
May 26, 2021	1	Initial Release
August 2, 2021	2	Corrected Logic Table
October 19, 2021	3	Corrected Pinout Definitions
December 17, 2021	4	Updated MSL Rating
January 31, 2022	5	Updated Typical Application Diagram

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Pin Layout and Definitions

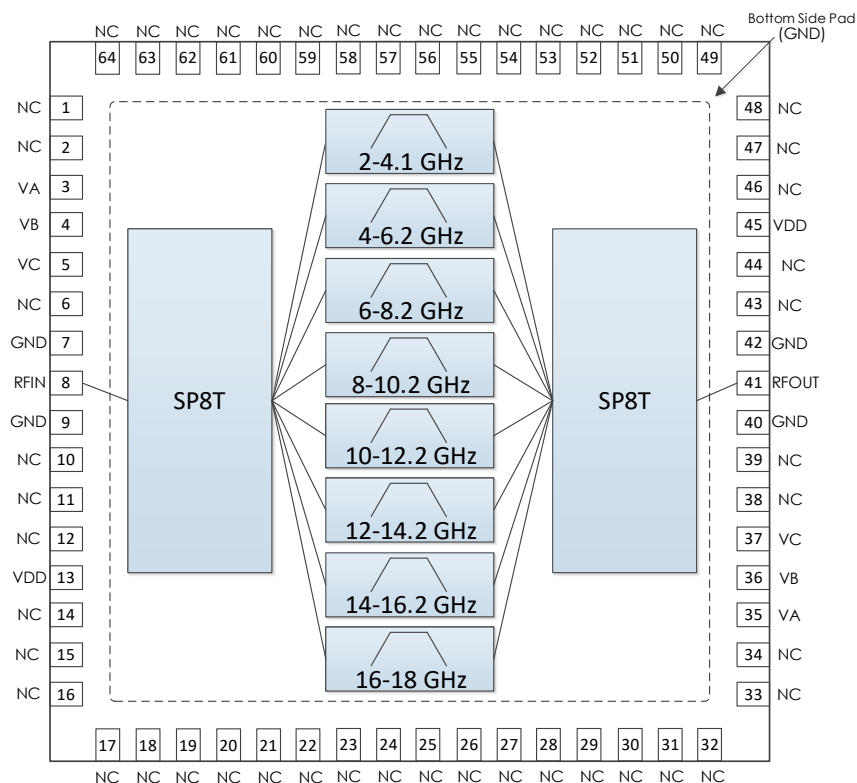


Pin Number	Pin Name	Pin Function
1, 2	NC	No Connect
3	VA	Switch Control A
4	VB	Switch Control B
5	VC	Switch Control C
6	NC	No Connect
7	GND	Ground – Common
8	RF IN	RF Input – 50 Ohms – DC Coupled, External DC Blocking Cap Required
9	GND	Ground – Common
10-12	NC	No Connect
13	VDD	DC Power Input
14-34	NC	No Connect
35	VA	Switch Control A
36	VB	Switch Control B
37	VC	Switch Control C
38, 39	NC	No Connect

Note: NC pins may be grounded or left open

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Pin Layout and Definitions

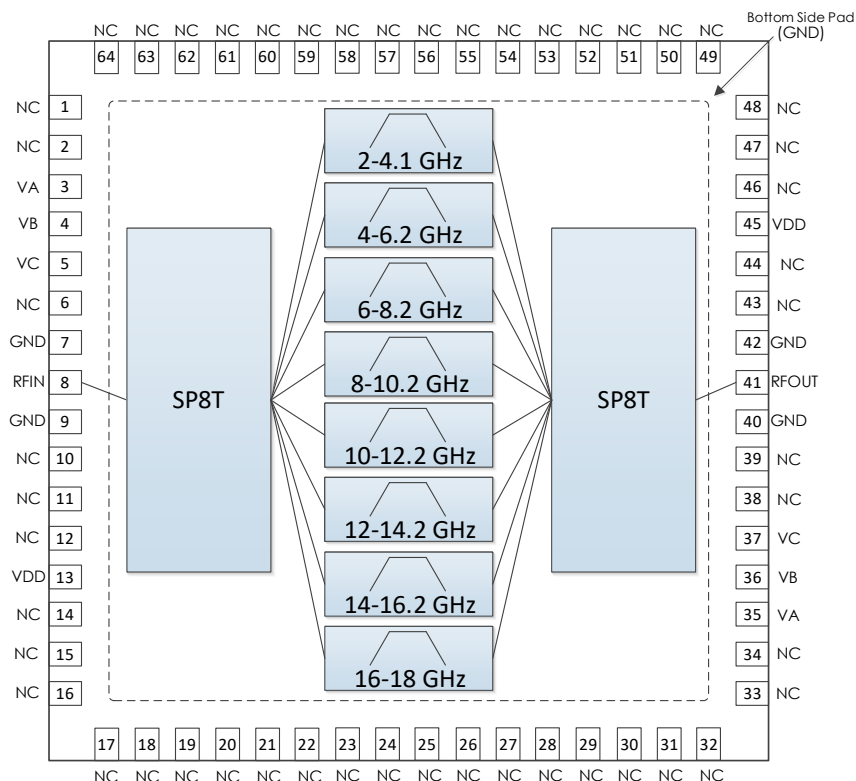

Pin Number	Pin Name	Pin Function
40	GND	Ground – Common
41	RF OUT	RF Output – 50 Ohms – DC Coupled, External DC Blocking Cap Required
42	GND	Ground – Common
43, 44	NC	No Connect
45	VDD	DC Power Input
46-64	NC	No Connect

Note: NC pins may be grounded or left open

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Specifications

Absolute Maximum Ratings

	Minimum	Maximum
RF Input Power		+27 dBm
Operating Junction Temperature	-40 C	+150 C
Storage Temperature Range	-55 C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
Moisture Sensitivity Level	MSL 3	
ESD classification (HBM survivable)	Class 1A	



Atlanta Micro products are electrostatic sensitive.
Follow safe handling practices to avoid damage

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage		+5.0 V	
Operating Case Temperature	-40 C		+85 C

Thermal Information

Junction to Case Thermal Resistance (θ_{JC})	100 C/W
Nominal Junction Temperature at +85C ambient	88 C
Channel Temperature to Maintain 1 Million Hour MTTF	105 C

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

DC Characteristics

(T = 25 °C unless otherwise specified)

Parameter	Testing Conditions	Minimum	Typical	Maximum
DC Supply Voltage		+3.0 V	+3.3 V	+5.2 V
DC Supply Current	VDD = +3.3V		26 mA	
	VDD = +5.0V		29 mA	
Power Dissipated	VDD = +3.3V		85.8 mW	
	VDD = +5.0V		145 mW	
Logic Level Low		-0.1 V		+0.5 V
Logic Level High		+2.0 V		+VDD V

RF Performance

(T = 25 °C unless otherwise specified)

Parameter	Testing Conditions	Minimum	Typical	Maximum
Frequency Range		2 GHz		18 GHz
Insertion Loss	VDD = +3.3V, Band 1		5.5 dB	
	VDD = +3.3V, Band 2		7.4 dB	
	VDD = +3.3V, Band 3		7.5 dB	
	VDD = +3.3V, Band 4		7.9 dB	
	VDD = +3.3V, Band 5		6.9 dB	
	VDD = +3.3V, Band 6		7.0 dB	
	VDD = +3.3V, Band 7		7.6 dB	
	VDD = +3.3V, Band 8		8.2 dB	
Return Loss	VDD = +3.3V		< -15 dB	

Timing Characteristics

Parameter	Minimum	Typical	Maximum
Switching Speed – Rise Time		25 ns	
Switching Speed – Fall Time		15 ns	

State Table

VC	VB	VA	Filter Band
L	L	L	8.0 – 10.2 GHz
L	L	H	12.0 – 14.2 GHz
L	H	L	14.0 – 16.2 GHz
L	H	H	4.0 – 6.2 GHz
H	L	L	6.0 – 8.2 GHz
H	L	H	16.0 – 18.0 GHz
H	H	L	10.0 – 12.2 GHz
H	H	H	2.0 – 4.1 GHz







To obtain price, delivery, or to place an order contact sales@atlantamicro.com
Atlanta Micro Inc., Now a part of Mercury Systems
3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Typical Performance







(T = 25 °C unless otherwise specified.)

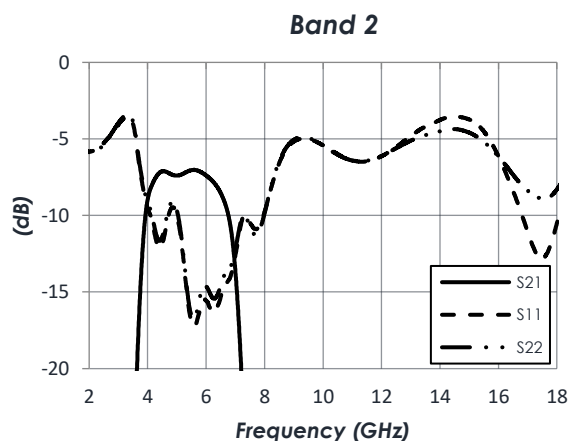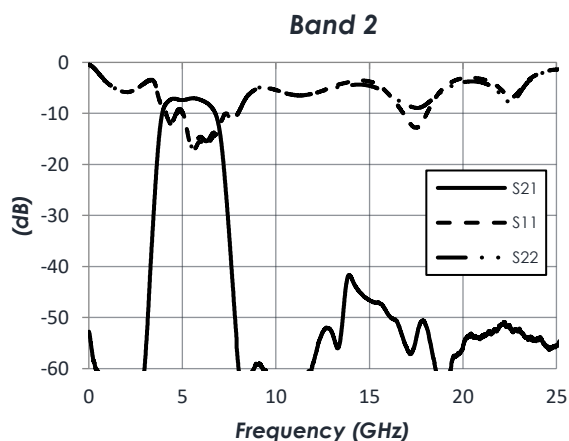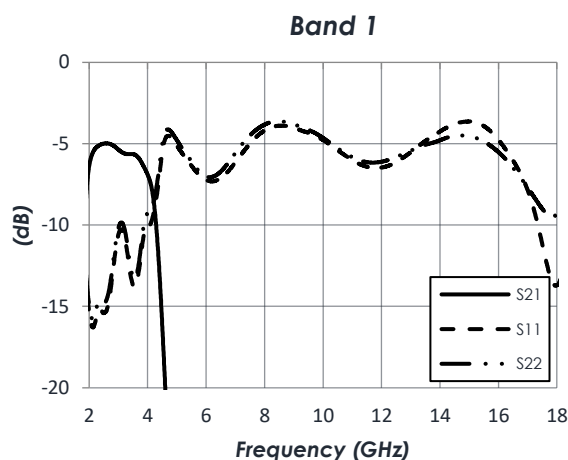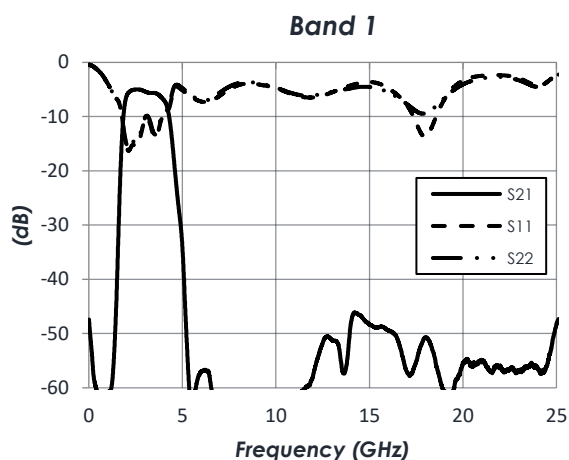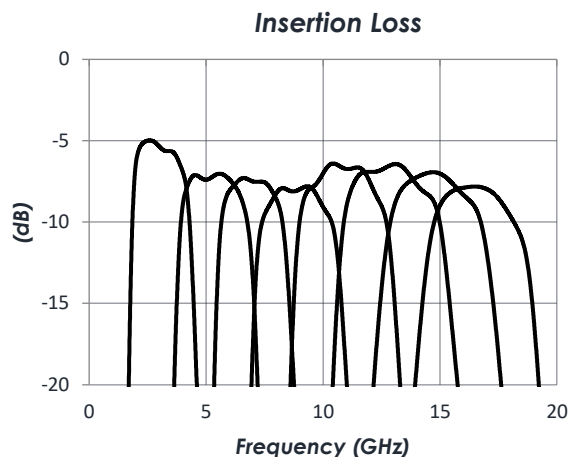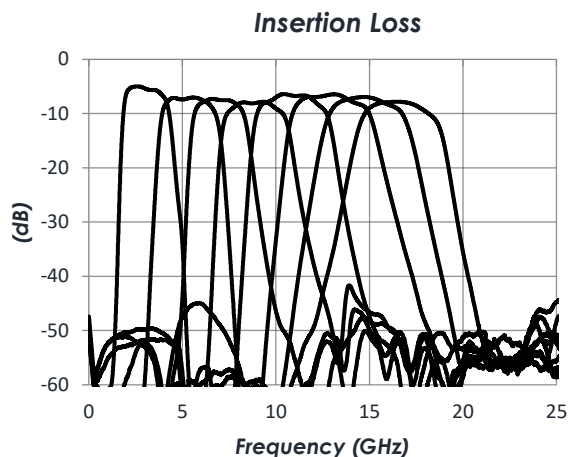

To obtain price, delivery, or to place an order contact sales@atlantamicro.com
 Atlanta Micro Inc., Now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM3215 – Preselector







2 GHz to 18 GHz Bandpass Filter Bank

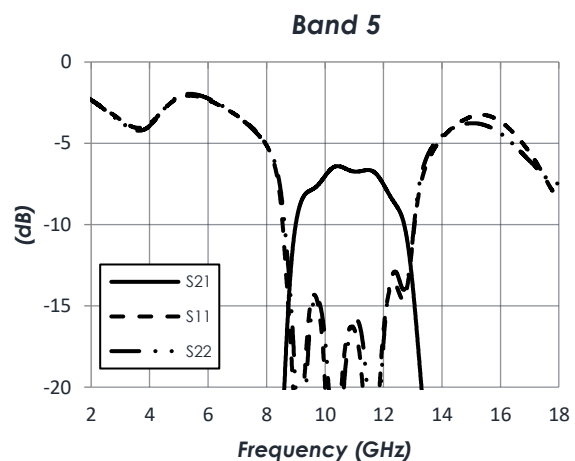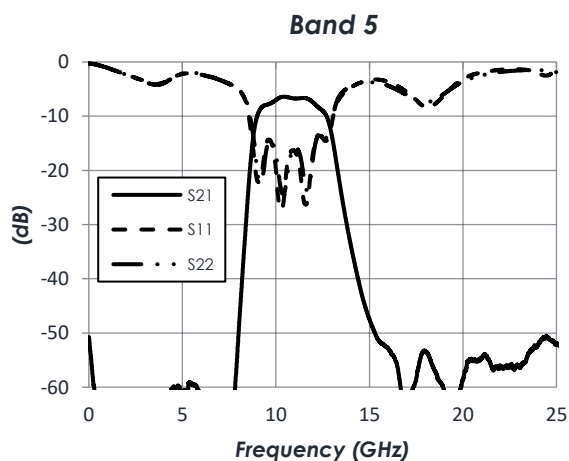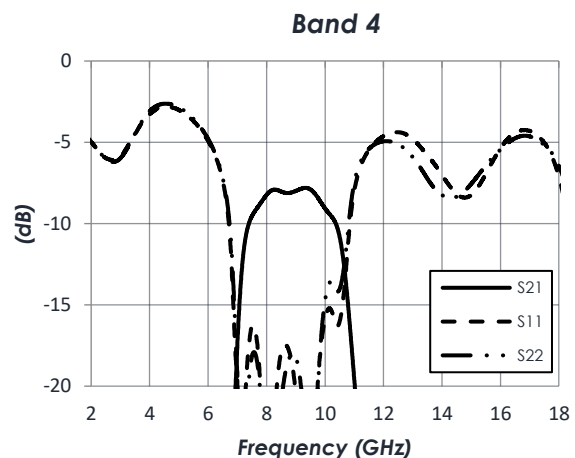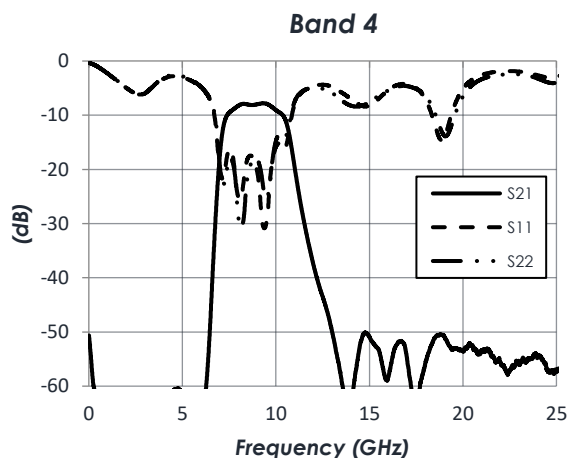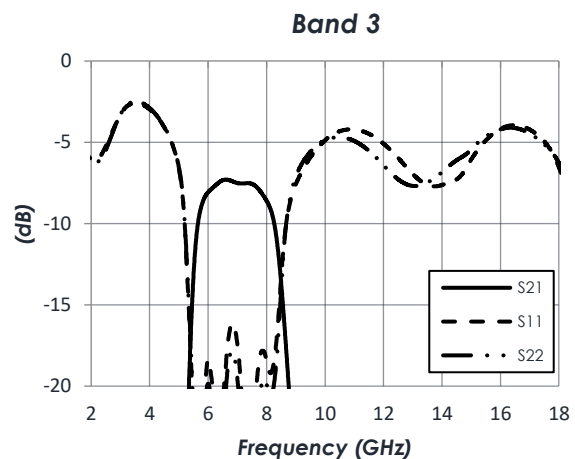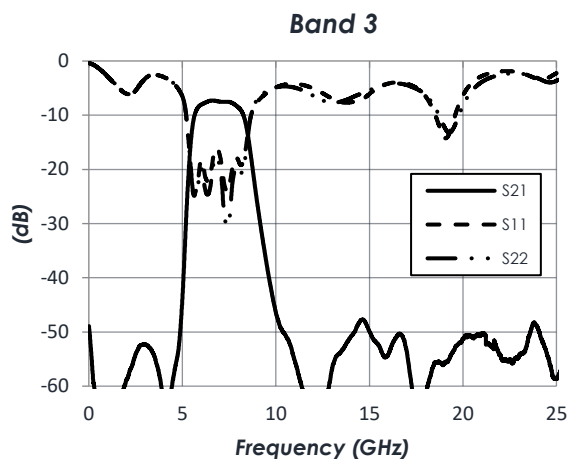

To obtain price, delivery, or to place an order contact sales@atlantamicro.com
 Atlanta Micro Inc., Now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM3215 – Preselector





2 GHz to 18 GHz Bandpass Filter Bank

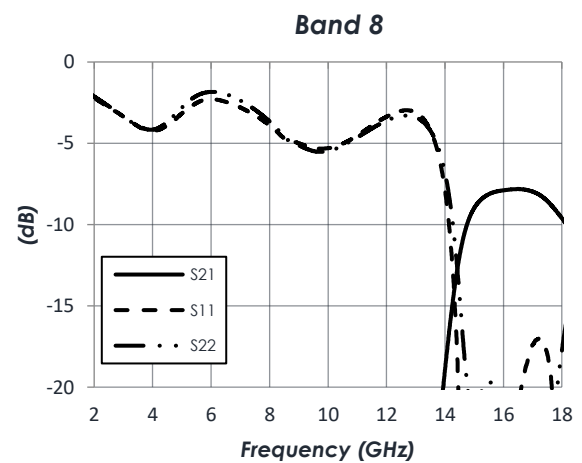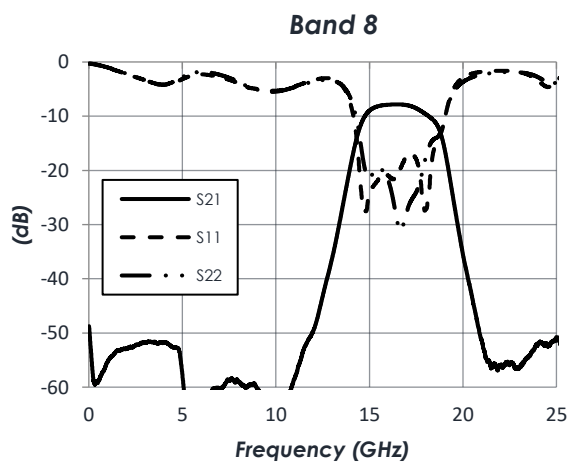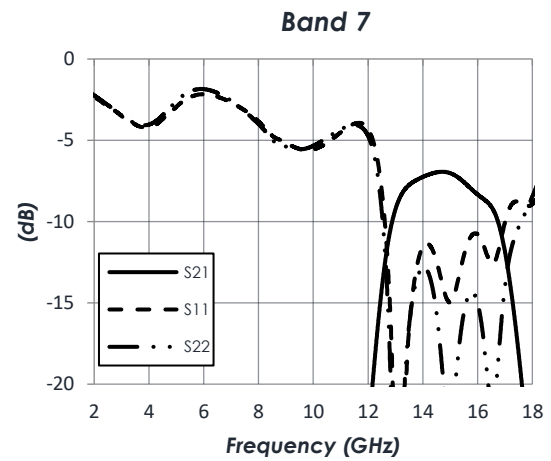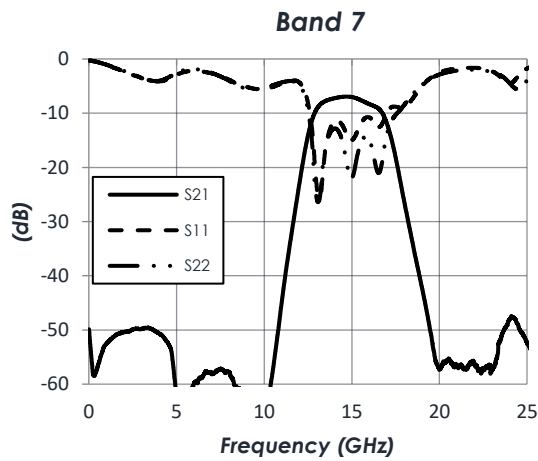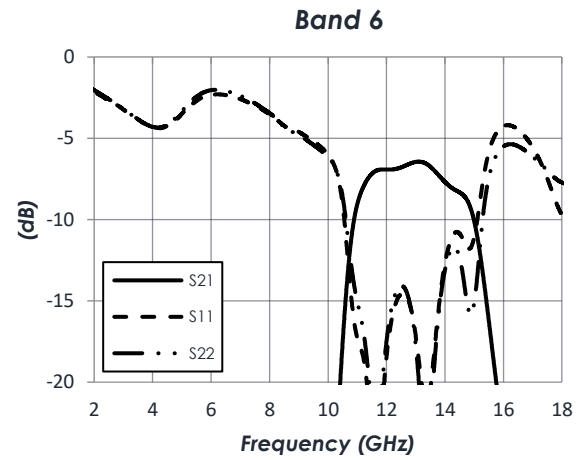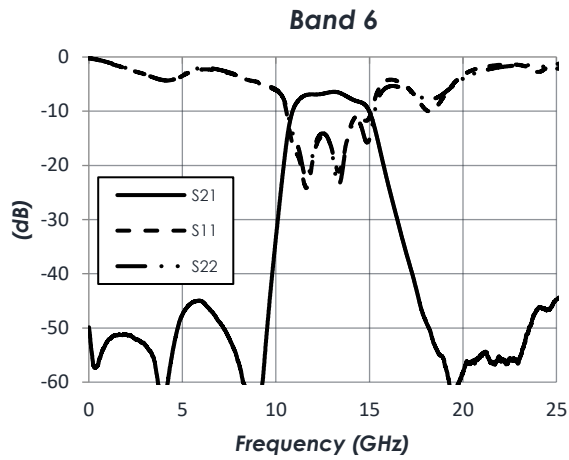

To obtain price, delivery, or to place an order contact sales@atlantamicro.com
 Atlanta Micro Inc., Now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

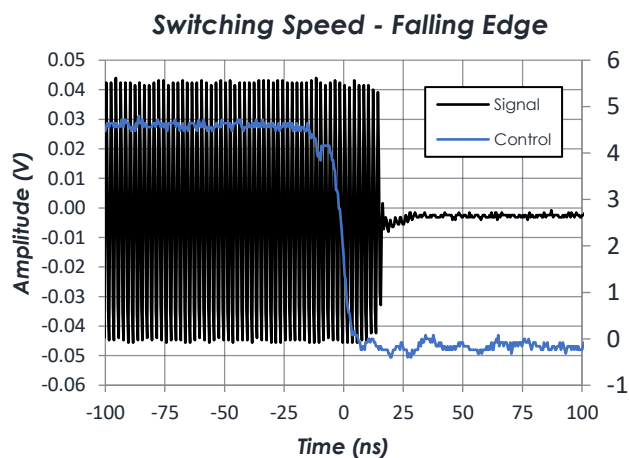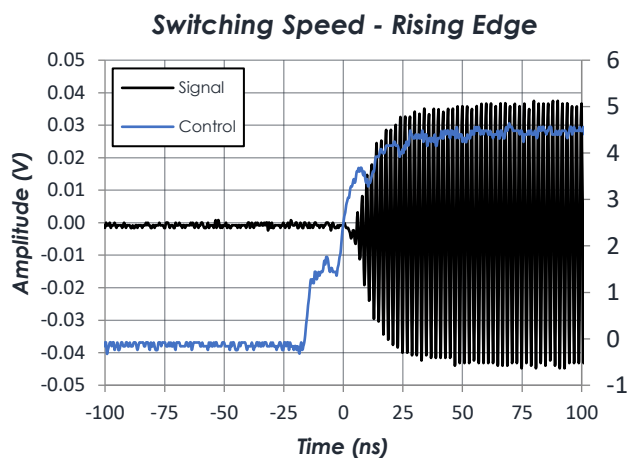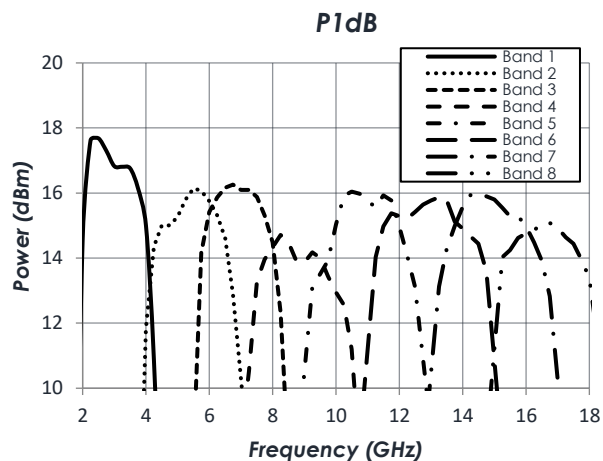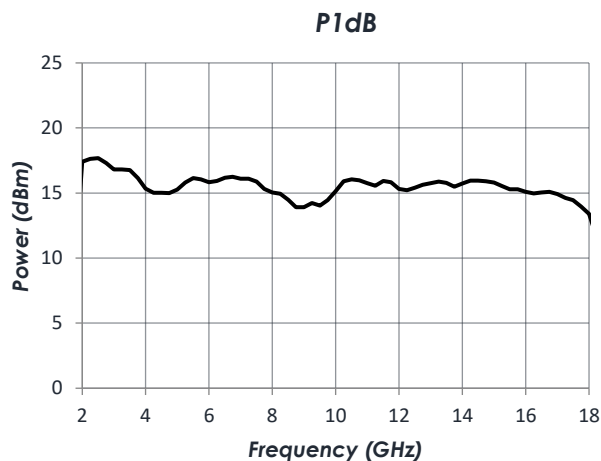


To obtain price, delivery, or to place an order contact sales@atlantamicro.com
 Atlanta Micro Inc., Now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Typical Application

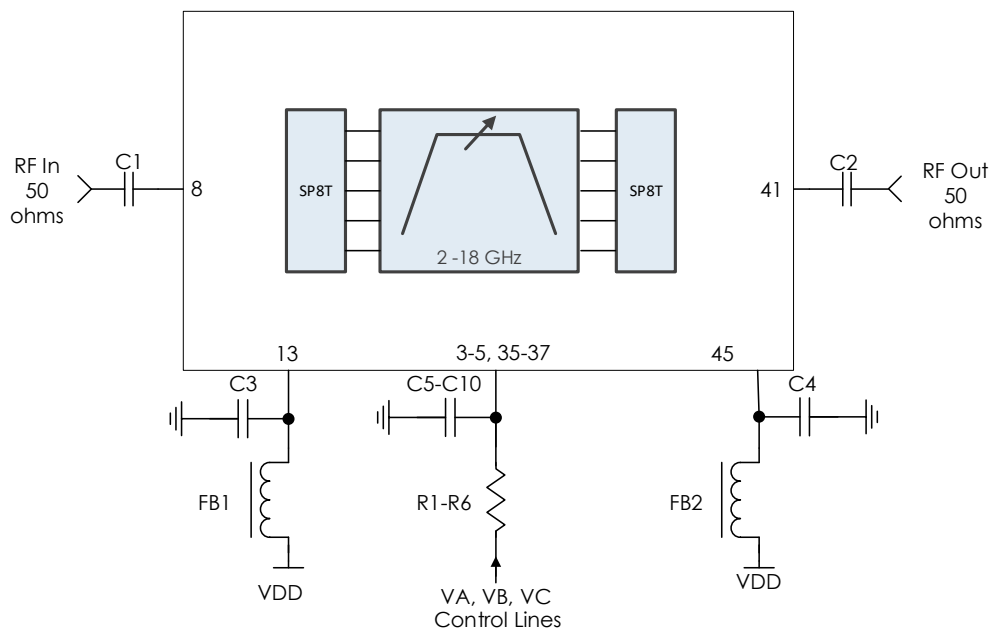

Recommended Component List (or equivalent):

Part	Value	Part Number	Manufacturer
C1, C2	0.1 μ F	0201BB104KW160	Passives Plus
C3-C10	0.1 μ F	C1005X7R1H104K050BB	TDK
FB1, FB2		MMZ1005A222E	TDK
R1-R6	100 Ω	CRCW0402100RFKED	Vishay


Notes:

1. DC blocking capacitors should be low-loss, broadband capacitors for optimum performance
2. Pins 3 and 35 can be tied together on board, following control line filtering.
3. Pins 4 and 36 can be tied together on board, following control line filtering.
4. Pins 5 and 37 can be tied together on board, following control line filtering.
5. Bypass capacitors (C5-C10) may limit switching speed. Reduce value as needed to achieve appropriate time constant.

AM3215 – Preselector

2 GHz to 18 GHz Bandpass Filter Bank

Evaluation PC Board

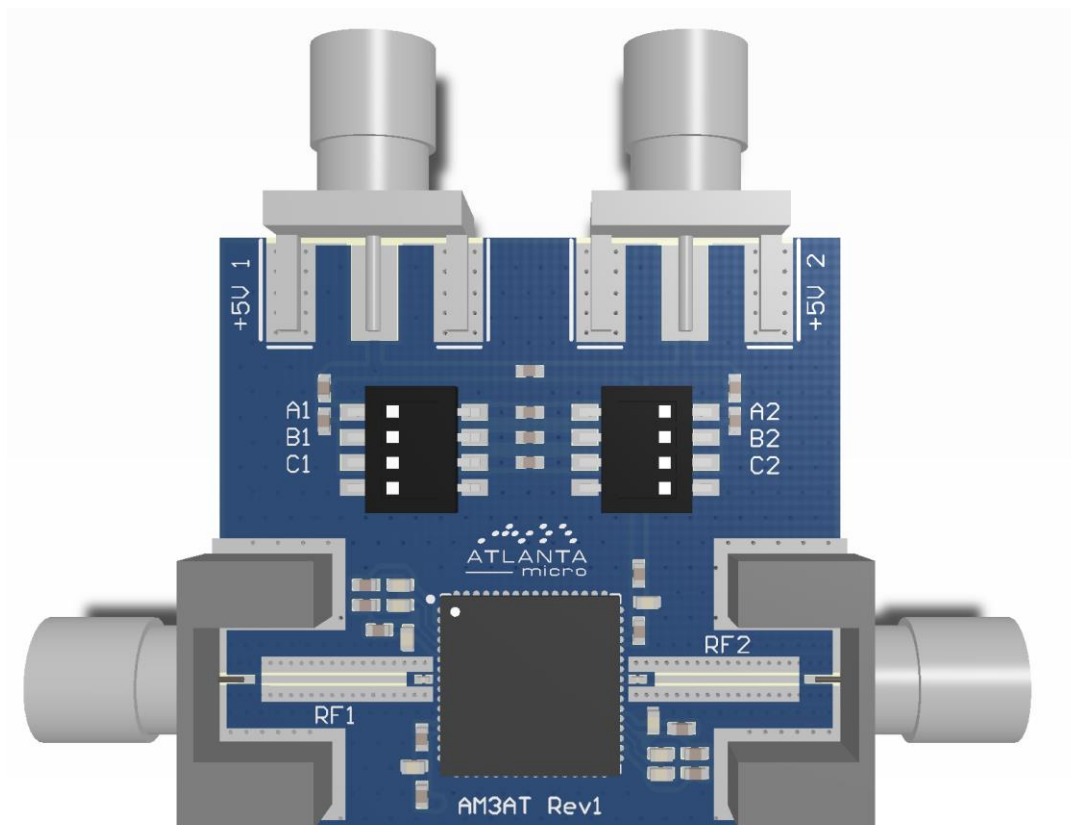

Related Parts

Part Number		Description		
AM3153	6 GHz to 26.5 GHz	Digitally Tunable Bandpass Filter		
AM3186	6 GHz to 26.5 GHz	Sub-Octave Bandpass Filter Bank		
AM3194	6 GHz to 18 GHz	Sub-Octave Bandpass Filter Bank		

Component Compliance Information

RoHS: Atlanta Micro, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Atlanta Micro shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Atlanta Micro, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Atlanta Micro does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Atlanta Micro's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Atlanta Micro takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.