


AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

Description


AM1113-D is a wideband, cascadable amplifier servicing the 2 to 18 GHz frequency range. The device exhibits low gain at the lower frequencies ascending to moderate gain at the higher frequencies. The increasing gain across frequency makes the AM1113-D an ideal solution to equalize gain/insertion loss across an RF system. Available as bare die in a 1.34mm x 0.91mm footprint with internal DC blocking capacitors and 50Ω matching.





Features

- 6.9 dB Gain Slope
- 5.6 dB Gain at 2 GHz
- 12.5 dB Gain at 18 GHz
- 3.5 dB Noise Figure
- +30 dBm OIP3
- +17 dBm P1dB
- +3.3V Operation
- 208 mW Power Consumption
- 1.34mm x 0.91mm
- -40C to +85C Operation

Functional Diagram

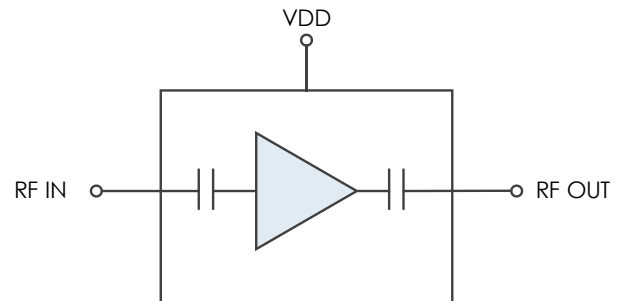

Characteristic Performance

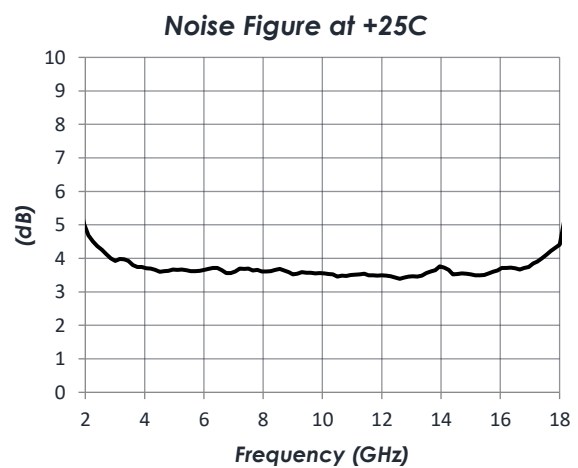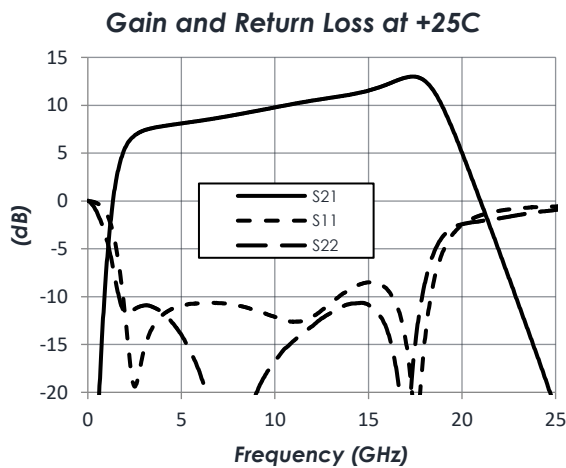

To obtain price, delivery, or to place an order contact MMICsales@mrchy.com
 Atlanta Micro Inc., now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com


Table of Contents

Description	1	DC Electrical Characteristics	5
Features	1	RF Performance	5
Functional Diagram	1	Typical Performance	6
Characteristic Performance	1	Typical Performance Continued	7
Revision History	2	Typical Application	8
Pin Layout and Definitions	3	Die Dimensions	9
Specifications	4	Part Ordering Details	9
Absolute Maximum Ratings	4	Recommended Wire Bonds	10
Handling Information	4	Related Parts	10
Recommended Operating Conditions	4	Component Compliance Information	11
Thermal Information	4		

Revision History

Date	Revision Number	Notes
April 28, 2022	1	Initial Release
April 12, 2024	2	Updated Plots and Diagrams

Pin Layout and Definitions

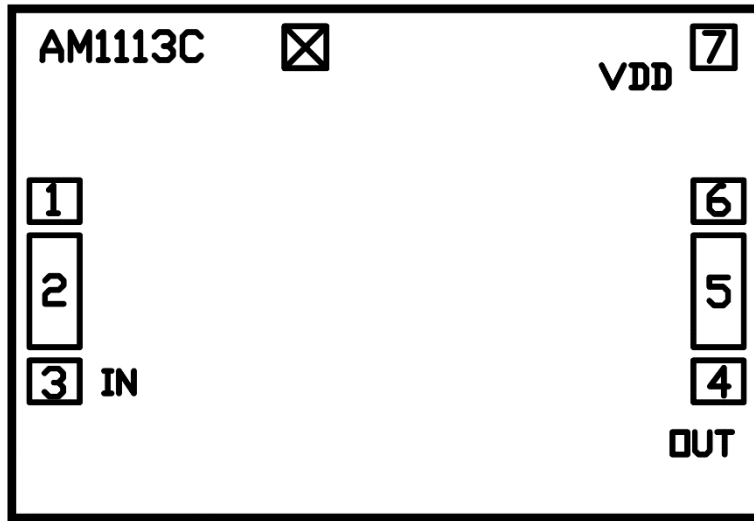

Pin Number	Pin Name	Pin Function
1	GND	Ground – Common
2	RF In	RF Input – 50 Ohms – DC Blocked
3	GND	Ground – Common
4	GND	Ground – Common
5	RF Out	RF Output – 50 Ohms – DC Blocked
6	GND	Ground – Common
7	Vd	DC Power Input

Note: NC pins may be grounded or left open

AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

Specifications

Absolute Maximum Ratings

	Minimum	Maximum
Supply Voltage	-0.3 V	+3.5 V
RF Input Power		+20 dBm
Storage Temperature Range	-55 C	+150 C

Note: Any device operation beyond the Absolute Maximum Ratings may result in permanent damage to the device. The values listed in this table are extremes and do not imply functional operation of the device at these or any other conditions beyond what is listed under Recommended Operating Conditions. Any part subjected to conditions outside of what is recommended for an extended amount of time may suffer from reliability concerns.

Handling Information

	Minimum	Maximum
ESD Sensitivity – Human Body Model (HBM)	Class 1A	



Atlanta Micro products are electrostatic sensitive.
Follow safe handling practices to avoid damage

Recommended Operating Conditions

	Minimum	Typical	Maximum
Supply Voltage		+3.3 V	
Operating Case Temperature	-40 C		+85 C

Thermal Information

Thermal Resistance (channel to backside ground)	288 C/W
Nominal Junction Temperature at +85C Ambient	+146 C
Channel Temperature to Maintain 1 Million Hour MTF	+175 C

AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

DC Electrical Characteristics

(T = 25 °C unless otherwise specified)

Parameter	Testing Conditions	Minimum	Typical	Maximum
DC Supply Voltage			+3.3 V	
DC Supply Current	VDD = +3.3V	58 mA	63 mA	68 mA
Power Dissipated	VDD = +3.3V		208 mW	

RF Performance

(T = 25 °C unless otherwise specified)

Parameter	Testing Conditions	Minimum	Typical	Maximum
Frequency Range		2 GHz		18 GHz
Gain	f = 2 GHz		5.6 dB	
	f = 10 GHz		10 dB	
	f = 18 GHz		12.5 dB	
Return Loss	f = 2 GHz		-11 dB	
	f = 10 GHz		-12 dB	
	f = 18 GHz		-10 dB	
Output IP3	f = 10 GHz		29.5 dBm	
Output P1dB	f = 10 GHz		17 dBm	
Noise Figure	f = 10 GHz		3.5 dB	






***Note:** OIP3 measured with 10MHz tone spacing with tones at Pin = -10dBm

AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

Typical Performance

(VDD = +3.3V, T = 25°C unless otherwise specified)

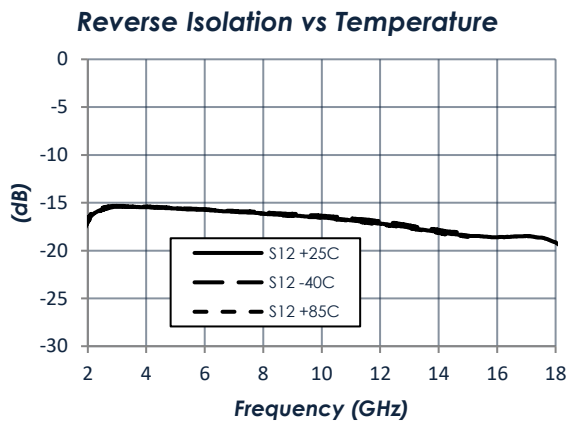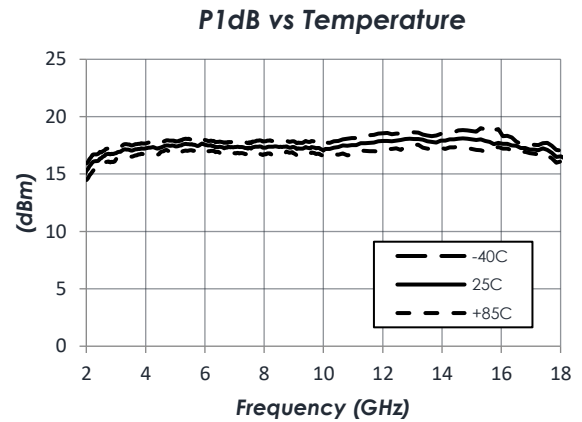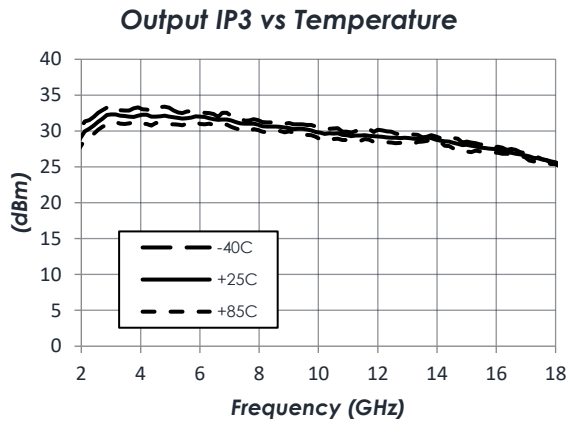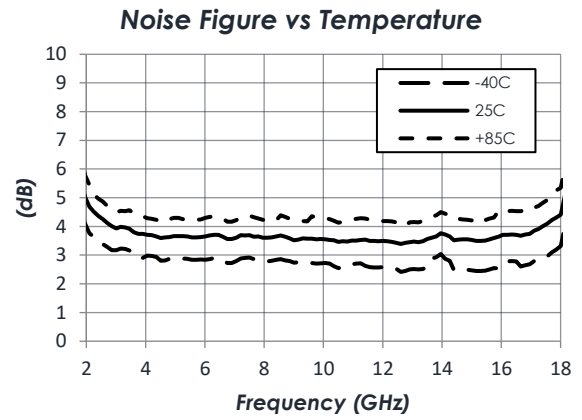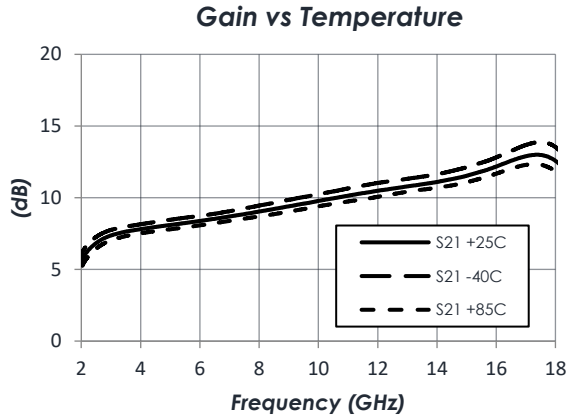



To obtain price, delivery, or to place an order contact MMICsales@mrchy.com
 Atlanta Micro Inc., now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

Typical Performance Continued

(VDD = +3.3V, T = 25°C unless otherwise specified)

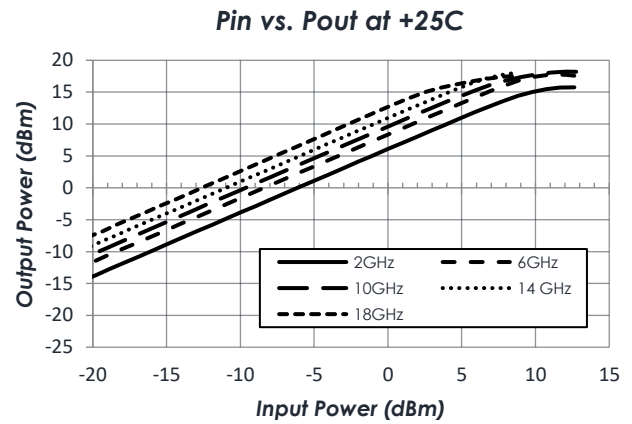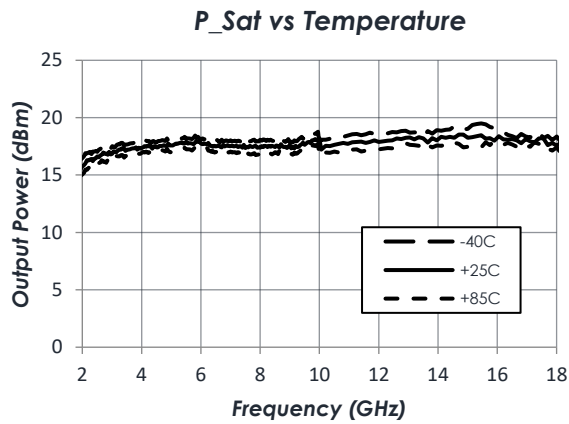


To obtain price, delivery, or to place an order contact MMICsales@mrchy.com
Atlanta Micro Inc., now a part of Mercury Systems
3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

Typical Application

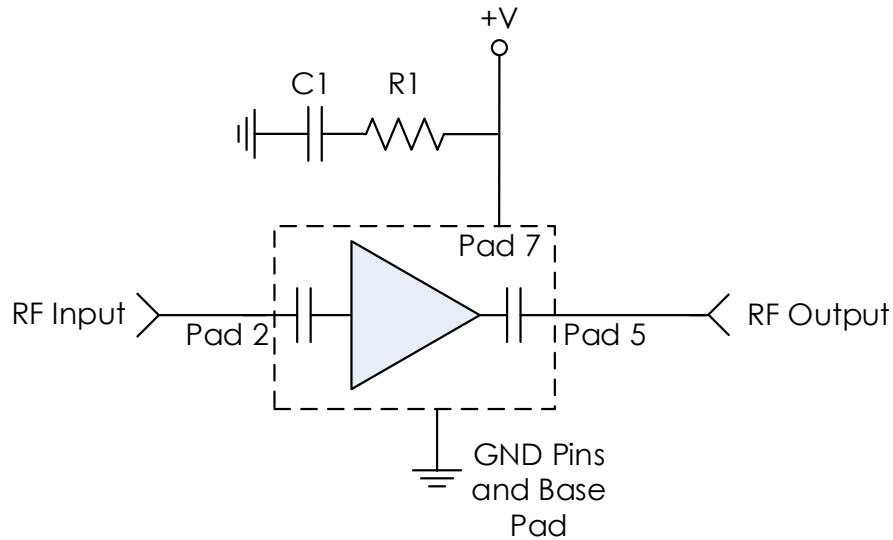

Note: NC pins may be grounded or left open

Recommended Component List (or equivalent):

Part	Value	Part Number	Manufacturer
C1	100 pF	SKT01A101Z10A6	Tecdia
R1	10 Ω	TDR-100F-9x12x6-E	Tecdia


Notes:

1. R1 and C1 are required for proper operation of the AM1113-D.
2. RF Input and RF Output connections are internally DC blocked.

AM1113-D – Amplifier

2 to 18 GHz Slope Correcting Gain Block

Die Dimensions

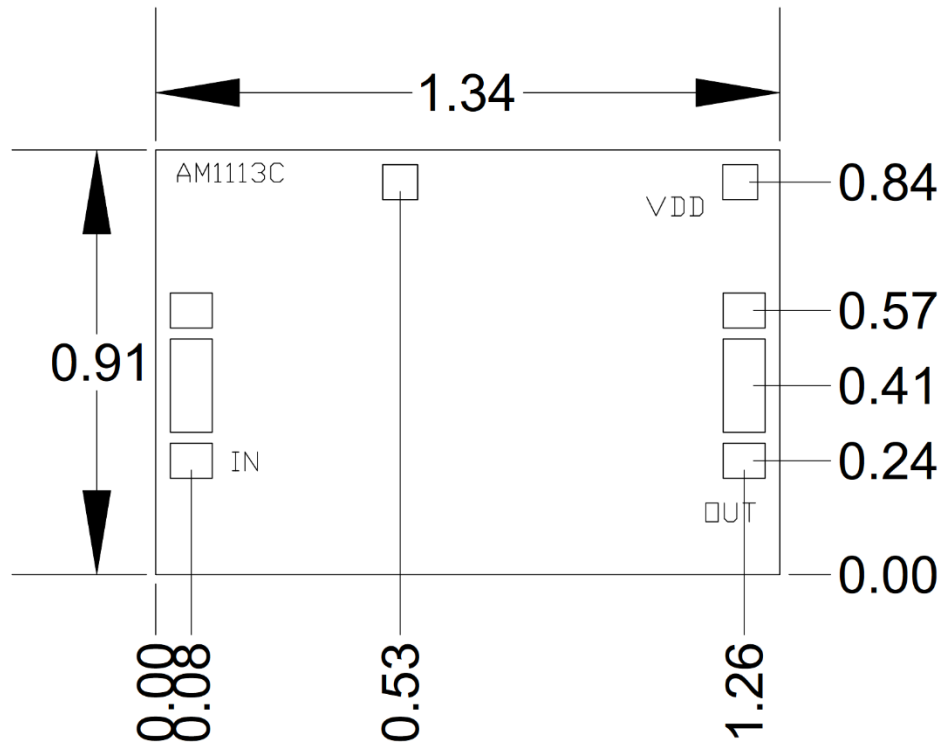


Notes:

1. Units in mm.

Part Ordering Details

Description	Part Number
1.34mm x 0.91mm Bare Die	AM1113-D
3mm 12 Lead QFN	AM1113
AM1113 3mm QFN Evaluation Board	AM1113-Eval

Recommended Wire Bonds

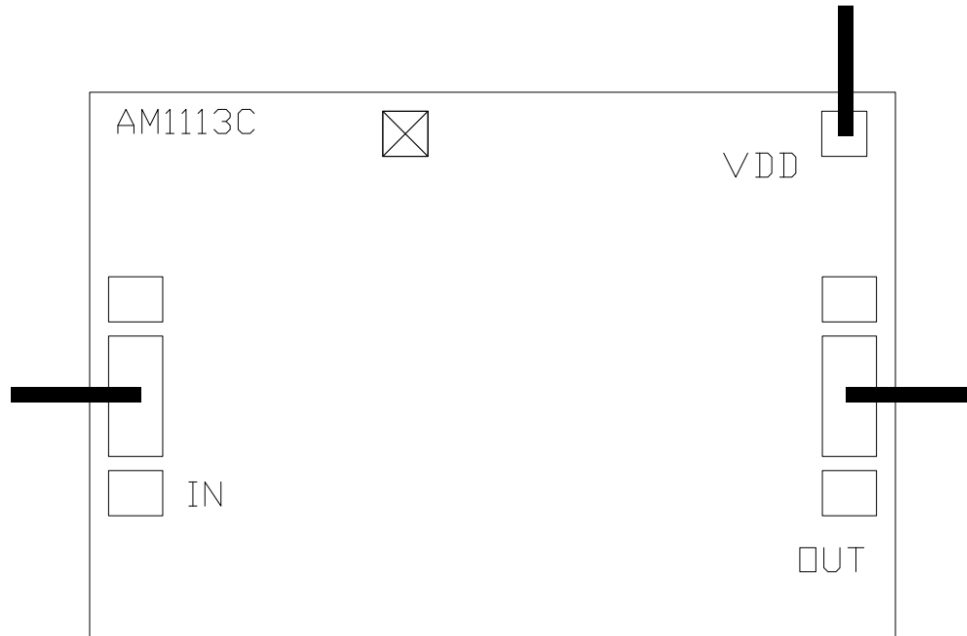

Notes:

1. RF pads should have one bond.
2. All RF bonds should be minimum length and minimum loop height for optimum performance.
3. Bonds should be 1 mil, gold.

Related Parts

Part Number				Description
AM1102-D	DC	to	22 GHz	Low Noise Amplifier
AM1110-D	2 GHz	to	18 GHz	Slope Correcting Amplifier, 9dB Slope
AM1114-D	2 GHz	to	18 GHz	Slope Correcting Amplifier, 5dB Slope

To obtain price, delivery, or to place an order contact MMICsales@mrchy.com
 Atlanta Micro Inc., now a part of Mercury Systems
 3720 Davinci Ct, Suite 400, Peachtree Corners, GA 30092 • Phone: (470) 253-7640 • www.atlantamicro.com

Component Compliance Information

RoHS: Atlanta Micro, Inc. hereby certifies that all products comply with the EC Directive 2011/65/EC on the Restriction of Hazardous Substances, commonly known as EU-RoHS 6 and 10. All products supplied by Atlanta Micro shall be compliant with the European Directive 2011/65/EC based on the following substance list.

Substance List	Allowable Maximum Concentration
Lead (Pb)	<1000 PPM (0.1% by weight)
Mercury (Hg)	<1000 PPM (0.1% by weight)
Cadmium (Cd)	<75 PPM (0.0075% by weight)
Hexavalent Chromium (CrVI)	<1000 PPM (0.1% by weight)
Polybrominated Biphenyls (PBB)	<1000 PPM (0.1% by weight)
Polybrominated Diphenyl ethers (PBDE)	<1000 PPM (0.1% by weight)
Decabromodiphenyl Deca BDE	<1000 PPM (0.1% by weight)
Bis (2-ethylhexyl) Phthalate (DEHP)	<1000 PPM (0.1% by weight)
Butyl Benzyl Phthalate (BBP)	<1000 PPM (0.1% by weight)
Dibutyl Phthalate (DBP)	<1000 PPM (0.1% by weight)
Diisobutyl Phthalate (DIBP)	<1000 PPM (0.1% by weight)

REACH: Atlanta Micro, Inc. neither uses nor intentionally adds any of the substances considered to be a Substance of Very High Concern (SVHC) as defined by the EU Regulation (EC) No. 1907-2006 on Registration, Evaluation, Authorization, and Restriction of Chemicals (REACH).

Conflict Materials: Atlanta Micro does not knowingly use materials that are sourced from the Democratic Republic of Congo (DRC) or any other known conflict regions. Atlanta Micro's supply chain is comprised of sources that are both environmentally and socially responsible. We periodically review this requirement with our vendors to ensure continued compliance.

Atlanta Micro takes its responsibility as a global partner seriously and will use due diligence within our supply chain to ensure all standards are met to the best of our knowledge.